

UDC SERIES Low ProFile™ 270VDC GROUND POWER UNITS



HORIZONTAL CONFIGURATION
(Shown with standard 4 inch feet and digital panel)

STANDARD FEATURES:

- IP55
- Certified to UL 1012
- 3 Phase, 380-480VAC input
- Indoor/Outdoor (Hangar/Ramp) Use
- ≤ 5% Input Current Distortion at max load
- Automatic Input Line Monitoring
- Advanced Integrated Display (AID™) Console
- 8000 Event Log / Diagnostics
- TCP/IP/Ethernet interface (Modbus)
- Internal Communication Ports - USB, RJ45 (ETHERNET), RS485 (Modbus), & RS232
- External Communication Ports – RJ45 (ETHERNET) & USB
- 10% Power Regulation
- Emergency Power “OFF” Switch
- I/O Voltage and Current Monitoring
- Input Frequency Monitoring
- Elapsed Time Meter
- Front Panel Voltage Adjust
- Front Panel Summary Fault Indicators
- Input High Voltage Transient Protection
- Multi Language (Romanization) Display - English, French, German, Italian, Portuguese, Russian and Spanish, Others - Specify

This product was manufactured in a plant whose quality management system is registered to ISO 9001:2015.



APPLICATION:

Since its beginning in 1960, Unitron has specialized in the design and development of reliable solid-state power systems for military applications. Through an innovative design, Built-In Test Equipment (BITE) and modular construction, Unitron products assure maximum power availability and minimal repair time for the latest military aircraft including the F-22A Raptor and the JSF F-35A.

The Low ProFile Series includes 270VDC, 400Hz and 28VDC GPUs designed to provide aircraft ground power in “low profile” applications, such as under passenger boarding bridges, in maintenance hangars, or on flight lines. This GPU reduces operating and maintenance costs, and saves valuable space in the hangar or on the ramp.

In addition to fixed GPUs, Unitron offers 400Hz, 28VDC, 270VDC and combination AC/DC units in towable, mobile and bridge-mounted configurations.

OPTIONS:

- Alternate Input Voltages Available (Specify)
- Various Convenience Outlets (Specify Voltage and Frequency)
- 50 or 100 foot Input Power Cable (Pigtail)
- Side Cable Hanger(s) or Top Cable Storage Rack
- DC Output Power Cable with Plug (Available in 35, 63, or 83 ft. lengths)
- 400Hz Output (combination units)
- Output Universal Aircraft Safety Interlock Circuit Disconnect (Single or Dual)
- Output Safety Disconnect
- Alternate Mounting Configurations Available
- Indoor Touch Screen Panel
- Bench Top Voltage Adjust
- Lockable Front Door
- Custom Paint & Decals (Standard Color - White)
- CE Mark Certified
- CSA Certified
- Stand - 4, 12 or 18 Inch
- Forklift Tubes - 4 Inch
- Leg Kit - 12 or 18 Inch

MECHANICAL SPECIFICATIONS:

Size:	See Figure 1		
Weight:	36kW = 637lbs. (289kgs.)	48kW = 753lbs. (342kgs.)	
	60kW = 925lbs. (420kgs.)	72kW = 1,017lbs. (461kgs.)	
Enclosure:	NEMA 3RX Corrosion Resistant		
Cooling:	Forced Convection		

SPECIFICATIONS / STANDARDS (Meets or Exceeds):

NFPA 70 (NEC 500)	EN 61000-6-2 and -4**
EN 60079-10	2006/95/EC**
MIL-STD-704F	UFGS 26 35 44
MIL-STD-1472	Lockheed Martin F-35 Ground
ISO 461-1/2	Electrical Power Interface Specification
ISO 1540	(Document No. 2ZEU00004, Rev-0007)
ISO 6858	

**Defined Basis of CE Mark Certification

GENERAL SPECIFICATIONS

AC INPUT:

Input Current Distortion	≤ 5%, typically 3%
Voltage	380 - 480 V, +10%, -15%, 3Ø, 3 or 4 wire plus ground (Alternate Voltages Available)
Frequency	50 - 60 Hz ± 10%
Phase Rotation	Any
Protection	Over/undervoltage, loss of phase, overcurrent, short circuit. Voltage transient protection IAW IEEE C62.41.1, Location Cat. B/C
Inrush Current	No greater than 100% of full load current

28VDC OUTPUT:

Overload	100% continuous; 150% for 5 sec; 200% for 1 sec; 250% for 50 msec
Current Rating	15 Amps continuous
Voltage	28 VDC, 2 wire, grounded
Voltage Regulation	± 0.5%
Voltage Adjust	28 VDC ± 10%
Output Ripple Voltage	150 mV pk to pk
Protection	Overload, short circuit, overvoltage

ENVIRONMENTAL:

Acoustical Noise	< 65 dBA maximum at 5 feet (1.5m)
Temperature Range	-40°C to +55°C
Relative Humidity	0 - 95%, Non-Condensing
Ingress of Water	Type 3RX, IP55

270VDC OUTPUT:

Power Rating	36, 48, 60, or 72 kW
Overload	100% continuous 150% for 5 sec. 200% for 1 sec 250% for 50 msec.
Pulse Loads	IAW LMCO Drawing No. 2ZEU00004, Rev-0007
Voltage	270 VDC, 2 wire, grounded negative
Voltage Regulation	± 3 volts under all conditions of line balanced loads and temperature
Voltage Adjust	270 VDC ± 10%
Output Ripple Voltage	3.0 volts pk to pk
Transient Response	(25% load changes) IAW MIL-STD-704F
Protection	Overload, short circuit, overvoltage and safety disconnect
Power Regulation	10%

ENERGY FACTORS:

Efficiency	93% typical at full load; 91% typical at half load; varies depending on configuration
Energy Efficiency Ratio	20.0 typical

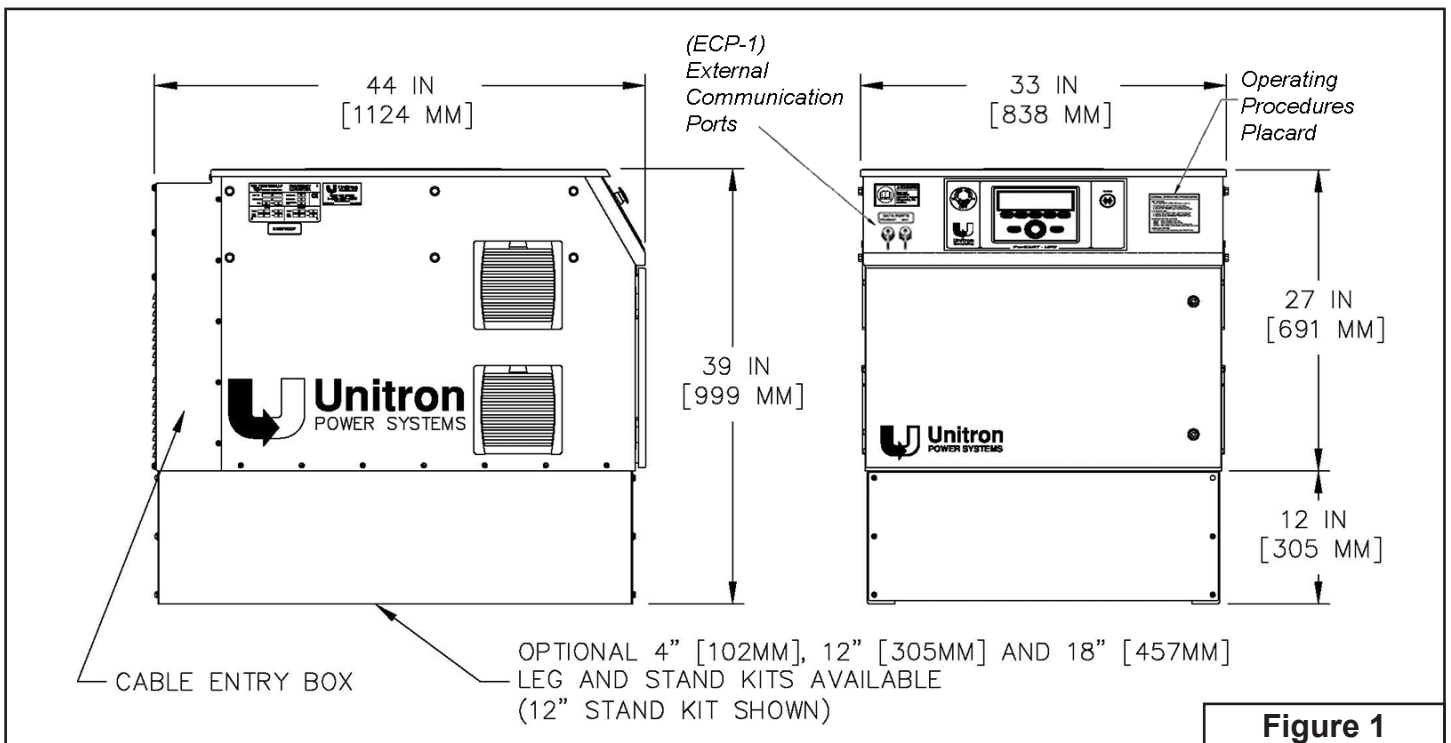


Figure 1