

UltraLite™ SERIES 28VDC GROUND POWER UNIT



WALL MOUNT CONFIGURATION
(Shown with optional vertical stand and standard touch screen panel)

STANDARD FEATURES:

- IP55
- Certified to UL 1012
- Indoor/Outdoor (Hangar/Ramp) Use
- ≤ 5% Input Current Distortion at Max Load
- Input Auto Ranging
- Automatic Input Line Monitoring
- Advanced Integrated Display (AID™) Console
- 8000 Event Log / Diagnostics
- TCP/IP/Ethernet interface (Modbus)
- Internal Communication Ports - USB, RJ45 (ETHERNET), RS485 (Modbus), & RS232
- External Communication Port – USB
- 15% Power Regulation
- Emergency Power “OFF” Switch
- I/O Voltage and Current Monitoring
- Input Frequency Monitoring
- Input Power Factor Correction
- Elapsed Time Meter
- Sleep Mode - for regional jet applications
- Front Panel Voltage Adjust
- Front Panel Summary Fault Indicators
- Input High Voltage Transient Protection
- Output Current Limit Adjust from 150 to full rated current
- Multi Language Display - Arabic, Asian, English, French, German, Italian, Portuguese, Russian and Spanish, Others - Specify

This product was manufactured in a plant whose quality management system is registered to ISO 9001:2015.



APPLICATION:

Since its beginning in 1960, Unitron has specialized in the design and development of reliable solid-state power systems. Through an innovative design, advanced self-diagnostic systems (BITE) and modular construction, Unitron products assure maximum power availability and minimal repair time.

The **FlatPak** Series includes 115/200VAC, 28VDC and 400Hz converters designed for installation where space is limited. The units mount “flat” against a wall, and offer the smallest size to power-rating ratio in the industry.

Continuing in our industry innovation, Unitron has created state-of-the-art 28VDC GPUs designated as its **UltraLite** Series. This series employs features and options that have been derived to meet the special **No-Break Power Transfer** (NBPT) requirements often imposed by “glass cockpit” attributes of certain avionics equipment operated in the more advanced mid-sized 28VDC Business Jets and Regional Airlines. By providing the essentials of a NBPT system, Unitron’s **UltraLite** System 28VDC GPUs avoid needless ground delays caused by insufficient DC voltage being applied to the aircraft during engine starts when using a traditional 28VDC GPU which incorporates 1940s Transformer/Rectifier technology. These NBPT characteristics of the Unitron **UltraLite** Series GPUs used during engine starting conditions eliminates the risk of having to re-boot important digital based navigational equipment aboard many larger, longer range 28VDC aircraft thereby minimizing costly time spent on the ground.

OPTIONS:

- Various Convenience Outlets (Specify Voltage and Frequency)
- Cable Saddle Accessory
- Single DC Output Power Cable with Plug available up through 100 foot lengths (Specify)
- Output Universal Aircraft Safety Interlock Circuit Disconnect (Single Output Only)
- External Communication Port - Ethernet
- Output Safety Disconnect
- Bench Top Voltage Adjust
- Output 28VDC Aircraft Safety Interlock Circuit Disconnect
- Dual 28VDC output (Contact Factory)
- Alternate Mounting Configurations Available
- Mounting Stand
- Lockable Front Door
- Custom Paint & Decals (Standard Color - White)
- CSA Certified
- CE Mark Certified

SPECIFICATIONS / STANDARDS:

2006/95/EC*	Low Voltage Directive
ISO 461-1/2	Aircraft - Connectors for Ground Electrical Supplies
ISO 1540	Characteristics of aircraft electrical system
ISO 6858	Aircraft ground support electrical supplies
MIL-STD-704F	Aircraft electric power characteristics
MIL-STD-1472	Human Engineering Design Criteria

GENERAL SPECIFICATIONS

INPUT:

Input Current Distortion	≤ 5%, typically 3% (At Max Load)
Voltage Auto Ranging	208-240V and 380-480V, +10%, -15%, 3Ø, 3 or 4 wire plus ground
Frequency	50 - 60 Hz ± 10%
Phase Rotation	Any
Protection	Over/undervoltage, loss of phase, overcurrent, short circuit. Voltage transient protection IAW IEEE C62.41.1, Location Cat. B/C
Inrush Current	No greater than 100% of full load current

ENVIRONMENTAL:

Acoustical Noise	< 65 dBA maximum at 5 feet (1.5m)
Temperature Range	-40°C to +55°C
EMI/RFI	Compatible with aircraft systems
Relative Humidity	10 - 95%, Non-Condensing
Ingress of Water	Type 3SX, IP55

MECHANICAL SPECIFICATIONS:

Size:	See Figure 1
Weight:	Model 620 - 310lbs. (140kg.) Model 420 - 291lbs. (132kg.) *Depending upon configuration
Enclosure:	NEMA 250 - Type 3SX
Cooling:	Forced Convection

OUTPUT:

Model 420

Full Load Rating	425 amps continuous
Overload (10% duty cycle)	600 amps for 1 hour 1000 amps for 1 minute


Model 620

Full Load Rating	600 amps continuous
Overload (10% duty cycle)	1000 amps for 1 minute

Model 420/620

Engine Start Capacity (10% duty cycle)	Adjustable up to 1600 amps for 35 seconds or 2000 amps for 30 seconds
Voltage	28 VDC, 2 wire, grounded negative
Voltage Regulation	
<ul style="list-style-type: none"> 100% continuous rated load and ±10% input voltage 	± 0.5% over any nominal input voltage range
<ul style="list-style-type: none"> No load to rated load with nominal input voltage 	± 0.5%
<ul style="list-style-type: none"> Overload with nominal input voltage 	See start mode curves
Voltage Adjust	28 VDC ± 10%
Current Limit Adjust	150A to full rated current
Protection	Overload, short circuit, over voltage and safety disconnect (if specified)
Power Regulation	15%

FIGURE 1

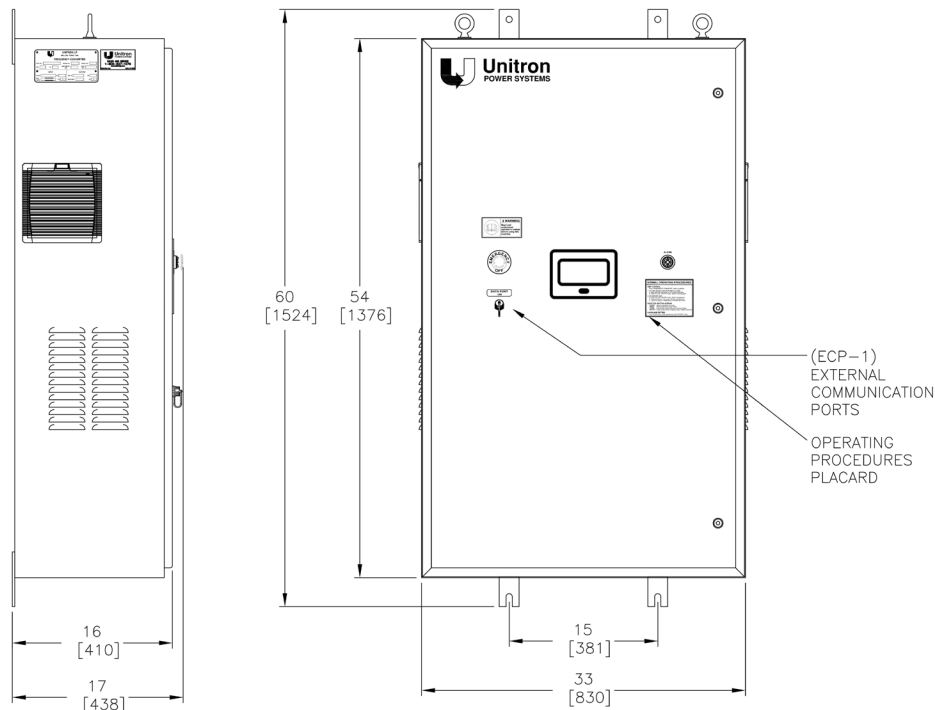

**UltraLite™ Series FlatPak™
28VDC GROUND POWER UNIT (GPU)**