

## UFC SERIES Low ProFile™ 400Hz AND 28VDC 400Hz GROUND POWER UNIT 120kVA to 180kVA



BOARDING BRIDGE CONFIGURATION  
(Shown with touch screen panel)

### STANDARD FEATURES:

- IP55
- Certified to UL 1012
- 3 Phase, 380-480VAC input
- Indoor/Outdoor (Hangar/Ramp) Use
- ≤ 5% Input Current Distortion at max load
- Automatic Input Line Monitoring
- Advanced Integrated Display (AID™) Console
- 8000 Event Log / Diagnostics
- Internal Communication Ports - USB, RJ45 (ETHERNET), RS485 (Modbus), & RS232
- External Communication Port – USB
- 15% Automatic Line Drop Compensation
- Emergency Power “OFF” Switch
- 18-Inch Hazard Area Clearance
- Voltage, Current, & Frequency Monitoring
- Elapsed Time Meter
- Sleep Mode
- Front Panel Voltage Adjust
- Front Panel Summary Fault Indicators
- Output Current Limit Adjust from 150A to full rated current
- Single Input Connection
- Input High Voltage Transient Protection
- Multi Language Display - Arabic, Asian, English, French, German, Italian, Portuguese, Russian and Spanish, Others - Specify

### MECHANICAL SPECIFICATIONS:

Size:	See Figure 1
Weight:	120.0kVA = 1,700lbs. (771kg.) 150.0kVA = 1,851lbs. (840kg.) 180.0kVA = 2,020lbs. (916kg.)
Enclosure:	NEMA 250 - Type 3SX
Cooling:	Forced Convection

This product was manufactured in a plant  
whose quality management system is  
registered to ISO 9001:2015.



### APPLICATION:

Since its beginning in 1960, Unitron has specialized in the design and development of reliable solid-state power systems. Through an innovative design, advanced self-diagnostic systems (BITE) and modular construction, Unitron products assure maximum power availability and minimal repair time.

The Low ProFile Series includes 115/200VAC, 400Hz, 28VDC, and 270VDC converters designed to provide aircraft ground power in "low profile" applications such as under passenger boarding bridges, in maintenance hangars, or on flight lines. The dual output AC/DC GPU provides simultaneous AC and either 425 or 600 amps continuous DC power from a single GPU. Kilowatt power for the complete unit is limited to the kilowatt rating of the 400Hz output of the unit. Because a single unit can do the work of two, Unitron's AC/DC GPU reduces operating and maintenance costs, and save valuable space in the hangar or on the ramp. The dual outputs provided can be single source controlled, be individually voltage regulated and line drop compensated, and configured for partial redundancy.

Output power ratings for these **400Hz** Ground Power Units (GPUs) range from 20kVA to 180kVA. Dependent upon rating, these units are available in mobile, towable, fixed and bridge-mounted configurations. When ramp or floor space is a premium, the **Low ProFile** GPU can be installed as an overhead mounted unit.

In addition to bridge-mounted GPUs, Unitron offers mobile, fixed and towable configurations.

### OPTIONS:

- Alternate 3-phase, Input Voltages of 208-240 or 600VAC
- Various Convenience Outlets (Specify Voltage and Frequency)
- AC Output Power Cable with Aircraft Plug (Specify Length)
- DC Output Power Cable with Plug (Specify Length)
- Output Universal Aircraft Safety Interlock Circuit Disconnect (Single or Dual)
- External Communication Port - Ethernet
- Output Safety Disconnect
- 270VDC output
- Second 28VDC output
- Alternate third or fourth outputs - 28VDC each at 600 Amps continuous with Individual Safety Disconnect from aircraft
- Individual Output Voltage Regulation / ALDC
- TCP/IP/Ethernet interface (Modbus)
- Indoor Touch Screen Panel
- No Break Power Transfer Compatible
- Custom Paint & Decals (Standard Color - White)
- Ground Fault Monitor
- 300% overload for 6 seconds
- CSA Certified
- CE Mark Certified
- Alternate Mounting Configurations Available
- Stand - 4, 12 or 18 Inch
- Forklift Tubes - 4 Inch
- Leg Kit - 12 or 18 Inch
- Neutral Interrupt Protection
- Universal Safety Interlock

### SPECIFICATIONS / STANDARDS (Meets or Exceeds):

NFPA 70 (NEC 500)	SAE ARP 5015
EN 60079-10	DFS-400
ISO 461-1/2	UFGS 26 35 43
ISO 1540	MIL-STD-1472
ISO 6858	MIL-STD-704F

\*\*Defined Basis of CE Mark Certification

**GENERAL SPECIFICATIONS**

**INPUT:**

Input Current Distortion	≤ 5%, typically 3%
Voltage	380 to 480 volts, +10%, -15%, 3Ø, 3 or 4 wire plus ground (Alternate Voltages Available)
Frequency	50-60 Hz ± 10%
Phase Rotation	Any
Protection	Over/undervoltage, loss of phase, overcurrent, short circuit. Voltage transient protection IAW IEEE C62.41.1, Location Cat. B/C
Inrush Current	No greater than 100% of full load current

**DC OUTPUT:**

**Model 420**

Full Load Rating	425 amps continuous
Overload (10% duty cycle)	600 amps for 1 hour 1000 amps for 1 minute

**Model 620**

Full Load Rating	600 amps continuous
Overload (10% duty cycle)	1000 amps for 1 minute

**Model 420/620**

Engine Start Capacity (10% duty cycle)	Adjustable up to 1600 amps for 35 seconds or 2000 amps for 30 seconds
Voltage	28 VDC, 2 wire, grounded negative
Voltage Regulation	<ul style="list-style-type: none"> <li>▪ Continuous rated load and ±10% input voltage ± 0.5%</li> <li>▪ No load to rated load with nominal input voltage ± 0.5%</li> <li>▪ Overload with nominal input voltage See start mode curves</li> </ul>
Voltage Adjust	28 VDC ± 10%
Current Limit Adjust	150A to full rated current
Protection	Overload, short circuit, over voltage and safety disconnect
Automatic Line Drop Compensation (ALDC)	10%

**AC OUTPUT:**

Power Rating	120, 150, or 180 kVA (Specify)						
Power Factor Range	0.5 lagging to 0.8 leading						
Overload:	<table border="0" style="width: 100%;"> <tr> <td style="width: 50%;">100% continuous;</td> <td>110% for 60 min;</td> </tr> <tr> <td>125% for 10 min;</td> <td>150% for 2 min;</td> </tr> <tr> <td>200% for 20 sec</td> <td></td> </tr> </table>	100% continuous;	110% for 60 min;	125% for 10 min;	150% for 2 min;	200% for 20 sec	
100% continuous;	110% for 60 min;						
125% for 10 min;	150% for 2 min;						
200% for 20 sec							
Voltage	115/200 volts, 3Ø, 4 wire, grounded neutral						
Crest Factor	1.414 ± 3%						
Voltage Regulation	± 1.0% under all conditions of line, balanced loads and temperature						
Voltage Transients	IAW MIL-STD-704F						
Frequency Regulation	400 Hz ± 0.01% under all conditions of line, load and temperature						
Frequency Transients	None						
Phase Angle Regulation	± 1° for balanced loads; ± 2° for unbalanced loads						
Harmonic Distortion	2.0% maximum						
Protection	Overload, short circuit, over/undervoltage and safety disconnect						
Automatic Line Drop Compensation (ALDC)	15%						

**ENVIRONMENTAL:**


Acoustical Noise	< 65 dBA maximum at 5 feet (1.5m)
Temperature Range	-40°C to +55°C
Relative Humidity	10 - 95%, Non-Condensing
Ingress of Water	Type 3SX, IP55

**ENERGY FACTORS:**

Efficiency	94% typical at full load; 92% typical at half load; varies depending on configuration
Energy Efficiency Ratio	20.0 typical

NOTE  
\*Use 28VDC output only during engine start mode

FIGURE 1

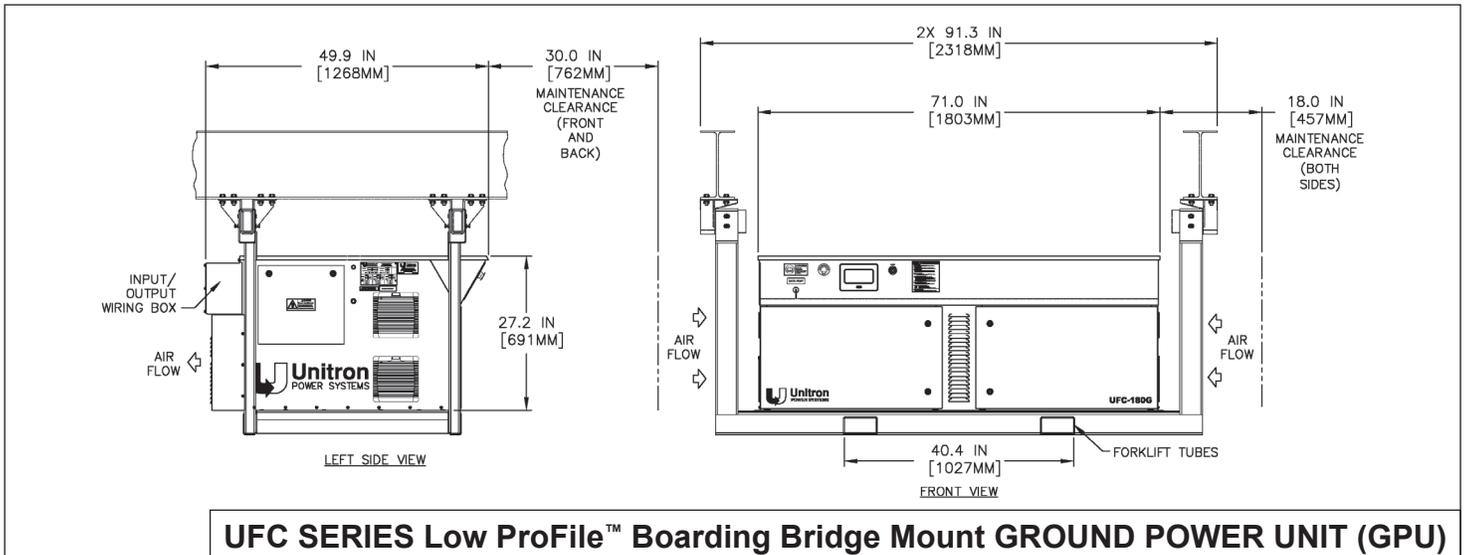

**UFC SERIES Low ProFile™ Boarding Bridge Mount GROUND POWER UNIT (GPU)**