



MOBILE CONFIGURATION  
(Shown in Trailer Mounted Configuration)

## FoxAir MAX Series Mobile HVAC 59,000 BTU

The FoxCart's FoxAir MAX Series is a portable HVAC unit capable of delivering 59,000 BTU of refrigerated air for pre-cooling or maintenance operations, with a minimum ambient temperature of 35°F (1.67°C). With an additional 20 kW 'Heater' option, the FoxAir MAX can create that comfortable climate year round.

### STANDARD FEATURES:

- Sealed Refrigerant System for Unmatched Reliability and Performance
- 1820 CFM Air Movement System
- 20" x 25" x 2" Air Filter
- Quick-Connect Collar for Quick and Easy Connection of Air Delivery Hose
- FoxAir MAX is Mounted on a Trailer with Oversized 205/65-14 Tires (5mph Tow)

### INPUT:

Voltage Range	208 - 230, 1Ø or 3Ø 430 - 480, 3Ø 540 - 575, 3Ø 2 Wire, Plus Safety Ground
Frequency	60 Hz ± 10%
Safety Disconnect	Circuit Breaker ON / OFF

### ENVIRONMENTAL:

Refrigerant Type / Qty	R410A - 82 oz
Moisture Protection	IP24
Air Filter	20" x 25" x 2" (Qty 2)
Sound Level	78 dBa

### INDICATORS:

Min Ambient Temp	35°F
------------------	------

### OPTIONS:

- 20 kW Heater
- Air Delivery Hose (12" Lay Flat Duct - 25 Feet)  
50 Feet (Requires Extension Coupling)
- Drain Hose Kit - 50' or 100' Feet (Specify)
- Integral Freeze Protection Switch Prevents Condenser Coil Freeze-Up
- 50', 100', or 150' Foot Input Power Cable (Pigtail - Specify)
- Condensation Vu-Thru Tank - 21 Gallons
- Convenience Outlet - 120VAC (Specify Voltage)

### MECHANICAL SPECIFICATIONS:

Size:	See Figure 1 for FoxAir MAX
Weight:	1,155lbs (2,934kg)

(Weight Varies with Options)

### OPERATING CONDITIONS:

Modes	Cool or Fan Only
-------	------------------

### CAPACITY RATINGS (OUTPUT):

Cooling BTU / Tons	59,000 / 5.0
Heating (Optional)	20 kW
Airflow	1820 CFM
Energy Efficiency Ratings	
SEER	14
EER	11.5

# GENERAL SPECIFICATIONS:

Specifications subject to change without notice

Rev K

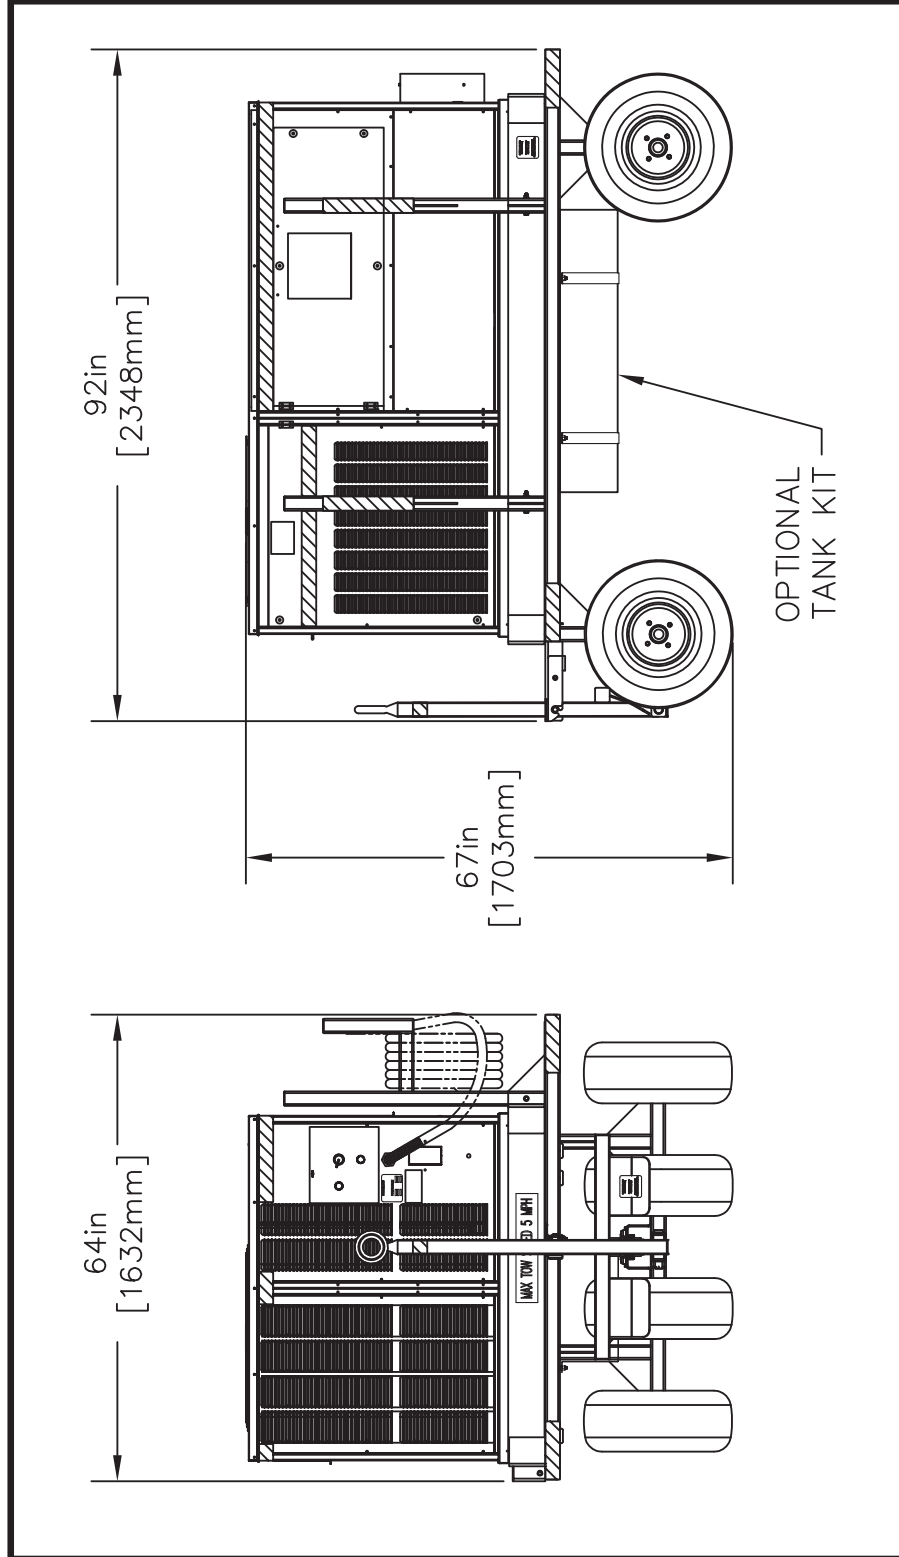


FIGURE 1 - FoxAir MAX